

P1 964149

REC'D 25 FEB 2003

WIPO

PCT

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office

February 14, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 10/058,721

FILING DATE: January 28, 2002

RELATED PCT APPLICATION NUMBER: PCT/US03/00821



By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

*W. Montgomery*  
W. MONTGOMERY  
Certifying Officer

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

01 30 02

A

DOCKET NO. : BELL-0159/00064

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of:

Thomas W. Rehkopf

Serial No.: Not yet assigned

Group Art Unit: Not yet assigned

Filing Date: Herewith

Examiner: Not yet assigned

For: SYSTEM AND METHOD FOR ACCESSING COMPUTER SERVICES VIA A WIRELESS NETWORK

EXPRESS MAIL LABEL NO: EL884785466US  
DATE OF DEPOSIT: January 28, 2002

EL884785466US

Box ☒ Patent Application  
☐ Sequence ☐ Design

Assistant Commissioner for Patents  
Washington, DC 20231

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find

☒ A Utility Patent Application under 37 C.F.R. 1.53(b).

It is a continuing application, as follows:

☐ continuation ☐ divisional ☐ continuation-in-part of prior application number  
\_\_\_\_/\_\_\_\_.

☐ A Design Patent Application (submitted in duplicate).

☒ Request for Nonpublication is attached.

01/28/02



10058721-012802

Including the following:

☒ New or Revised Specification, including pages 1 to 29 containing:

☒ Specification

☒ Claims

☒ Abstract

☐ Substitute Specification, including Claims and Abstract.

☐ The present application is a continuation application of Application No. \_\_\_\_\_ filed \_\_\_\_\_. The present application includes the Specification of the parent application which has been revised in accordance with the amendments filed in the parent application. Since none of those amendments incorporate new matter into the parent application, the present revised Specification also does not include new matter.

☐ The present application is a continuation application of Application No. \_\_\_\_\_ filed \_\_\_\_\_, which in turn is a continuation-in-part of Application No. \_\_\_\_\_ filed \_\_\_\_\_. The present application includes the Specification of the parent application which has been revised in accordance with the amendments filed in the parent application. Although the amendments in the parent C-I-P application may have incorporated new matter, since those are the only revisions included in the present application, the present application includes no new matter in relation to the parent application.

☐ A copy of earlier application Serial No. \_\_\_\_\_ Filed \_\_\_\_\_, including Specification, Claims and Abstract (pages 1 - @@), to which no new matter has been added TOGETHER WITH a copy of the executed oath or declaration for such earlier application and all drawings and appendices. Such earlier application is hereby incorporated into the present application by reference.

☐ Please enter the following amendment to the Specification under the Cross-Reference to Related Applications section (or create such a section) : "This Application:

☐ is a continuation of ☐ is a divisional of ☐ claims benefit of U.S. provisional Application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.

20021010 12485007

- ☐ Signed Statement attached deleting inventor(s) named in the prior application.
- ☐ A Preliminary Amendment.
- ☒ 4 Sheets of Formal Drawings.
- ☐ Drawing view to publish: \_\_\_\_\_
- ☐ Petition to Accept Photographic Drawings.
- ☐ Petition Fee
- ☒ An ☐ Executed ☒ Unexecuted Declaration or Oath and Power of Attorney.
- ☐ An Associate Power of Attorney.
- ☐ An ☐ Executed ☐ Copy of Executed Assignment of the Invention to \_\_\_\_\_
- ☐ A Recordation Form Cover Sheet.
- ☐ Recordation Fee - \$40.00.
- ☐ The prior application is assigned of record to \_\_\_\_\_
- ☐ Priority is claimed under 35 U.S.C. § 119 of Patent Application No. \_\_\_\_\_  
filed \_\_\_\_\_ in \_\_\_\_\_ (country).
- ☐ A Certified Copy of each of the above applications for which priority is claimed:
- ☐ is enclosed.
- ☐ has been filed in prior application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.
- ☐ Please enter the following amendment to the first sentence of the specification (or create such a sentence): "This application claims benefit of international application No. \_\_\_\_\_, which was published under PCT Article 21(2) in English."

10058721-012802

- ☐ Applicant(s) by its/their undersigned attorney, claims small entity status under 37 C.F.R. §1.27 as:
- ☐ an Independent Inventor
  - ☐ a Small Business Concern
  - ☐ a Nonprofit Organization.
- ☐ Diskette Containing DNA/Amino Acid Sequence Information.
- ☐ Statement to Support Submission of DNA/Amino Acid Sequence Information.
- ☐ Sequence listing consisting of pages \_\_\_\_\_.
- ☐ The computer readable form in this application \_\_\_\_\_, is identical with that filed in Application Serial Number \_\_\_\_\_, filed \_\_\_\_\_. In accordance with 37 CFR 1.821(e), please use the ☐ first-filed, ☐ last-filed or ☐ only computer readable form filed in that application as the computer readable form for the instant application. It is understood that the Patent and Trademark Office will make the necessary change in application number and filing date for the computer readable form that will be used for the instant application. A paper copy of the Sequence Listing is ☐ included in the originally-filed specification of the instant application, ☐ included in a separately filed preliminary amendment for incorporation into the specification.
- ☐ Information Disclosure Statement.
- ☐ Attached Form 1449.
  - ☐ Copies of each of the references listed on the attached Form PTO-1449 are enclosed herewith.
- ☐ A copy of Petition for Extension of Time as filed in the prior case.
- ☐ Appended Material as follows: \_\_\_\_\_.
- ☒ Return Receipt Postcard (should be specifically itemized).

10058721-012802

☐ Other as follows: \_\_\_\_\_

**FEE CALCULATION:**

☐ Cancel in this application original claims \_\_\_\_\_ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)

				SMALL ENTITY		NOT SMALL ENTITY	
				RATE	FEE	RATE	FEE
DESIGN APPLICATION				\$165.00	\$	\$330.00	\$
UTILITY APPLICATIONS BASE FEE				\$370.00	\$	\$740.00	\$ 740.00
UTILITY APPLICATION; ALL CLAIMS CALCULATED AFTER ENTRY OF ALL AMENDMENTS							
		No. Filed	No. Extra				
	TOTAL CLAIMS	45 - 20 =	25	\$9 each	\$	\$18 each	\$ 450.00
	INDEP. CLAIMS	11 - 3 =	8	\$42 each	\$	\$84 each	\$ 672.00
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM			\$140	\$	\$280	\$
ADDITIONAL FILING FEE					\$		\$
TOTAL FILING FEE DUE					\$		\$ 1,862.00

☒ A Check is enclosed in the amount of \$ 1,862.00.

☒ The Commissioner is authorized to charge payment of the following fees and to refund any overpayment associated with this communication or during the pendency of this application to deposit account 23-3050. This sheet is provided in duplicate.

☐ The foregoing amount due.

☒ Any additional filing fees required, including fees for the presentation of extra claims under 37 C.F.R. 1.16.


☒ Any additional patent application processing fees under 37 C.F.R. 1.17 or 1.20(d).

10058721.012302

- ☒ The Commissioner is hereby requested to grant an extension of time for the appropriate length of time, should one be necessary, in connection with this filing or any future filing submitted to the U.S. Patent and Trademark Office in the above-identified application during the pendency of this application. The Commissioner is further authorized to charge any fees related to any such extension of time to deposit account 23-3050. This sheet is provided in duplicate.

**SHOULD ANY DEFICIENCIES APPEAR** with respect to this application, including deficiencies in payment of fees, missing parts of the application or otherwise, the United States Patent and Trademark Office is respectfully requested to promptly notify the undersigned.

Date: January 28, 2002

  
\_\_\_\_\_  
Raymond N. Scott, Jr.  
Registration No. 48,666

Woodcock Washburn LLP  
One Liberty Place - 46th Floor  
Philadelphia PA 19103  
Telephone: (215) 568-3100  
Facsimile: (215) 568-3439

©2001 WW

10058721.0128002

DOCKET NO. : BELL-0159/00064

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of:

Thomas W. Rehkopf

Serial No.: Not Yet Assigned

Group Art Unit: Not Yet Assigned

Filing Date: Herewith

Examiner: Not Yet Assigned

For: **SYSTEM AND METHOD FOR ACCESSING COMPUTER SERVICES VIA  
A WIRELESS NETWORK**

EXPRESS MAIL LABEL NO: EL884785466US  
DATE OF DEPOSIT: January 28, 2002


Assistant Commissioner for Patents  
Washington, DC 20231

**REQUEST FOR NONPUBLICATION**  
**UNDER 37 C.F.R. 1.213(a)**

I hereby certify that the invention disclosed in the attached application **has not and will not be** the subject of an application filed in another country, or under a multilateral agreement, that request publication at eighteen months after filing

I hereby request that the attached application not be published under 37 C.F.R. 1.213 (a). This request is signed in compliance with 37 C.F.R. 1.33(b) and is being submitted with the application upon filing.

Date: January 28, 2002



Raymond N. Scott, Jr.  
Registration No. 48,666

Woodcock Washburn LLP  
One Liberty Place - 46<sup>th</sup> Floor  
Philadelphia, PA 19103  
Telephone: (215) 568-3100  
Facsimile: (215) 568-3439

10058721-012002



5        **SYSTEM AND METHOD FOR ACCESSING COMPUTER SERVICES VIA A  
WIRELESS NETWORK**

**FIELD OF THE INVENTION**

10            The invention generally relates to the field of wireless communication.  
More particularly, the invention relates to accessing a computer application from a  
wireless apparatus.

**BACKGROUND OF THE INVENTION**

15            Two-way wireless e-mail pagers have become popular in recent years.  
Such wireless pagers can provide access to e-mail from remote locations. For example, a  
user of a Research In Motion wireless e-mail pager (available from Cingular Wireless,  
Atlanta, Georgia) can send and receive e-mail over a wireless communication network.  
With such a pager, the user can stay in contact even while driving a car, taking a bus,  
20    walking through a park, etc. Some two-way wireless communication devices provide e-  
mail services but do not provide access to many server based applications that are now  
available over the Internet. Some higher end two-way wireless communication devices  
do provide full access to Internet services; however, they are typically more expensive to  
purchase and typically have more expensive monthly access fees.

10058721.012802

Additionally, two-way wireless pagers do not contain information regarding the specific location of the device. Therefore, wireless pagers cannot easily request location dependent information, which may be valuable information. For example, a user may want to know the location of the closest Chinese Restaurant.

5 Because two-way wireless pagers do not "know" their location, requesting the location of the nearest Chinese Restaurant can be difficult.

In view of the foregoing, there is a need for accessing a computer application via a wireless communication network and for requesting location dependent information.

## SUMMARY OF THE INVENTION

The invention is directed to accessing a computer application from a wireless apparatus.

The wireless apparatus receives an indication of a service request from a user interface of the wireless apparatus. The wireless apparatus formats the service request indication as a message for communication over a wireless network and sends the formatted service request message over the wireless network.

The wireless apparatus may also request information that is dependent on the location of the wireless apparatus. To request such information, the formatted service request message includes an indication of the location of the wireless apparatus. The location indication may be entered by the user or automatically determined by the wireless apparatus. To automatically determine the location of the wireless apparatus, the apparatus may include a global positioning device that receives signals from a global positioning system and calculates the location of the apparatus based upon the received

signals. The calculated location may be included in the formatted service request message.

The formatted service request message may be sent to an integration server comprising wireless communication ports that receive the message and an integration  
5 application that processes the received message. The integration application parses a service request indication and optionally a location indication from the received message and determines a sever capable of servicing the service request. The service is requested from the server. Location information may also be sent to the server. A reply is received from the server and formatted for communication over the wireless network. The  
10 formatted reply is sent over the wireless network to the wireless apparatus.

The above-listed features, as well as other features, of the invention will be more fully set forth hereinafter.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 The invention is further described in the detailed description that follows, by reference to the noted drawings by way of non-limiting illustrative embodiments of the invention, in which like reference numerals represent similar parts throughout the several views of the drawings, and wherein:

20 Figure 1 is a block diagram of an illustrative system for accessing a computer application via an illustrative wireless communication apparatus, in accordance with an embodiment of the invention;

Figure 2 is a flow diagram of an illustrative method for accessing a computer application via a wireless communication apparatus and illustrating the

operation of a portion of the system of Figure 1, in accordance with an embodiment of the invention;

Figure 3 is a flow diagram of an illustrative method for accessing a computer application via a wireless communication apparatus and illustrating the operation of a portion of the system of Figure 1, in accordance with an embodiment of the invention; and

Figure 4 is a flow diagram of an illustrative method for sending information to a wireless communication apparatus and illustrating the operation of a portion of the system of Figure 1, in accordance with an embodiment of the invention.

#### DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

Figure 1 is a diagram of an illustrative environment 100 including an illustrative system (i.e., integration server 130) for accessing a computer application on an application server 150 via a wireless communication apparatus 110. As shown in Figure 1, wireless communication apparatus 110 comprises a wireless communication device 114, a user interface 116, a processor 118, a data store 119, and optionally a global positioning device 112.

Global positioning device 112 is operable to receive signals from satellites 105a, 105b, and 105c and to determine a global location based on the received signals. Satellites 105a, 105b, and 105c may be part of the Global Positioning System (GPS) that includes a constellation of satellites, ground stations, data links, and control facilities maintained by the United States Department of Defense. The GPS makes it possible for users (not shown) to determine their position and to navigate anywhere in the world. The GPS was originally designed by the military to provide precise location information to

track the movement of troops and equipment and to navigate military ships and aircraft. Recently however, the GPS has been used in commercial and civilian applications as well. GPS devices have been used in surveying and mapping, in aviation, marine, automobile navigation, backpacking, hiking, emergency rescue, and the like.

5           The GPS is made up of a number of satellites that orbit the earth and continually transmit the precise time and their position in space. Previously, civilian GPS signals were purposefully degraded for military security reasons in a practice referred to as Selective Availability. In May 2000 Selective Availability was discontinued so that the same units that previously were only accurate to within approximately 100 meters  
10 horizontally and 150 meters vertically, are now accurate to within approximately 10 meters horizontally and 15 meters vertically.

Global positioning device 112 receives signals from at least 3 satellites and calculates the precise location of the device by triangulation, using the travel time of a radio message from the satellite to the device for the calculation. Receiving data from  
15 additional satellites generally provides a more accurate location calculation.

Wireless communication device 114 is operable to transmit and receive messages via a wireless network 120. Wireless network 120 may be a Mobitex Radio Network (Mobitex) capable of sending and receiving e-mail messages through high frequency radio signals. Mobitex is operated by RAM Mobile Data, and Ardis, which is a  
20 joint venture of Motorola and IBM. Mobitex was developed in Sweden by Ericsson/Eritel and has been installed and is maintained in many other countries. For example, in Canada, Mobitex is operated by Roger's Cantel. Mobitex uses packet switched data transfer, which aggregates data into blocks called packets before transmission. Ericsson also manufactures a device called a Mobidem, which is a radio

based modem that is capable of transmitting digital information across the Mobitex data communication network. A Mobidem essentially provides an interface between a processor and a Mobitex network.

Wireless communication device 114 may be similar to a Research In Motion pager commercially available from Cingular Wireless, Atlanta, Georgia and may comprise a Mobidem having a Mobitex compatible port. In other embodiments, wireless communication device 114 may be similar to a cellular phone and wireless network 120 may be a cellular telephone network. Wireless communication device 114 and global positioning device 112 may communicate directly with each other or they may communicate through processor 118.

Processor 118 is operable to communicate with wireless communication device 114, user interface 116, global positioning device 112, and data store 119. A user (not shown) may enter commands and information into user interface 116. User interface 116 comprises an input device, such as a keypad, and a display device, such as a liquid crystal display. User interface 116 may also include other input devices such as a light pen, or the like for inputting information into processor 118. Once processor 118 receives data from user interface 116, processor 118 may communicate with integration server 130.

Integration server 130 is operable to transmit and receive messages via wireless network 120. Integration server 130 comprises wireless communication ports 132, an integration application 134, and optionally a data store 136. Wireless communication ports 132 send and receive messages and may comprise a Mobidem having Mobitex compatible ports. Data store 136 may be used to store user information, service request mapping information, application server mapping information, and the

like, described in more detail below. Data store 136 may be a hard disk, a memory, and the like.

Integration application 134 communicates with wireless communication ports 132 and with application servers 150a, 150b, and 150c. Integration application 134, therefore, provides an interface between wireless network 120 and application servers 150a, 150b, and 150c, by receiving a message containing a service request (and optionally location information) from wireless network 120 and communicating with an appropriate application server 150 to fulfill the service request, as described in more detail below. Integration application 134 typically uses the services of a middleware 140 to access an appropriate application server 150.

Middleware 140 receives the service request and calls the appropriate application server (e.g., application server 150a, 150b, 150c) to respond to the service request. Middleware 140 may execute on integration server 130, on an application server 150, on a standalone server (not shown), or distributed across multiple servers. Middleware 140 may communicate with integration server 130 and/or application servers 150 via a network (not shown), for example, the Internet, a local area network, a wide area network, or the like. Middleware 140 may be an industry standard middleware, BellSouth standard middleware, or the like.

Application servers 150 execute applications, such as for example, a user authentication application, RealPages<sup>SM</sup> telephone directory service, a bill balance reporting application, a payment history application, and the like. Such applications are normally not accessible to a wireless communication apparatus via e-mail messages. To overcome this disadvantage, an aspect of the invention provides such access via an integration server 130 that acts as an interface between wireless network 120 and

application servers 150. Further, another aspect of the invention provides location information in a message for a wireless communication network, thereby allowing location dependent information to be retrieved from application servers 150, as described in more detail below in connection with Figures 2 and 3.

5 Figure 2 is a flow diagram of an illustrative method for providing location information in a message for a wireless communication network. To facilitate illustration of the method, the flow diagram is described contemplating exemplary wireless apparatus 110 having an e-mail address of "user1@bellsouth.com" and an exemplary user located in Wildwood, New Jersey looking for the nearest Chinese Restaurant. As shown in Figure 10 2, at step 200, global positioning device 112 receives signals from satellites 105a, 105b, and 105c. As described above, satellites 105a, 105b, and 105c may be part of the GPS. Global positioning device 112 receives signals from at least three satellites, and maybe more, if increased location accuracy is desired.

15 At step 210, global positioning device 112 calculates the location of wireless apparatus 110 based on the received signals. The calculation may be performed according to known global positioning triangulation techniques. Typically, the location is calculated as a global latitude, longitude, and altitude; however, other coordinate systems are contemplated. Global positioning device 112 may calculate the location upon request by processor 118 or at intervals.

20 Alternatively, at step 210, processor 118 calculates the location after receiving signal information from global positioning device 112. This technique may be utilized to decrease the workload on global positioning device 112 or to allow global positioning device 112 to be a less complex device.



Global positioning device 112 may send the calculated location to processor 118 upon request by processor 118 or at intervals. Alternatively, global positioning device 112 device comprises a register, a memory location, or the like, that is accessible to processor 118 for containing the calculated location. With this alternative  
5 technique, processor 118 reads the register to determine the calculated location.

To illustrate operation at step 210, if wireless communication apparatus 110 is located in Wildwood, New Jersey, wireless communication apparatus 110 may calculate a latitude of 39.0 and a longitude of -74.8 based on signals received at step 200 from the GPS satellites. This latitude and longitude corresponds to a location in  
10 Wildwood, New Jersey and can be used by wireless communication apparatus 110 in conjunction with integration server 130 to provide location dependent information, as described in more detail below.

At step 220, processor 118 receives an indication of the service request from user interface 116. The indication of the service request may take many forms, but  
15 any form that can be appropriately interpreted by integration server 130 is acceptable. To illustrate one format by example, processor 118 may receive from user interface 116 an e-mail message addressed to "info@bellsouth.com," addressed from "user1@bellsouth.com," and having a message text of "Where is the closest Chinese Restaurant?"

20 At step 230, processor 118 formats the service request indication as a message for communication over wireless network 120. Processor 118 may also include the calculated location information in the formatted service request message. To illustrate, the service request indication may be formatted into a service request message 122 that includes a request portion 124 and a location portion 126. In keeping with the

example above, processor 118 appends the calculated latitude and longitude of 39.0 and -74.8 to the e-mail message resulting in a formatted e-mail message text of "Where is the closest Chinese Restaurant?\* 39.0, -74.8." Processor 118 may insert an asterisk, a comma, a line return, or the like to demarcate the beginning of location portion 126. As  
5 illustrated, an asterisk has been inserted to demarcate and separate location portion 126 from request portion 124.

At step 240, processor 118 causes the formatted service request message to be sent over wireless network 120, via wireless communication device 114. For example, the message may be an e-mail message containing the text "Where is the closest Chinese  
10 Restaurant?\* 39.0, -74.8." and may be sent to integration server 130 (at address "info@bellsouth.com") over wireless network 120 for processing of the service request message. Figure 3 shows an illustrative method for processing a service request message received at integration server 130.

At step 300, wireless communication ports 132 receive the formatted  
15 service request message from wireless network 120. In turn, integration application 134 receives the service request message from wireless communication ports 132. For example, integration application 134 receives an e-mail message containing message text "Where is the closest Chinese Restaurant?\* 39.0, -74.8."

At step 310, integration application 134 parses the service request message  
20 into request portion 124 and location portion 126. In the example, the e-mail message is parsed into request portion 124 that contains text "Where is the closest Chinese Restaurant?" and location portion 126 that contains text "39.0, -74.8."

At step 320, integration application 134 determines the service requested based on request portion 124. Several techniques may be employed to determine the

service request. Typically, there is a mapping from the contents of request portion 124 to a service. According to one technique, each service is associated with a keyword or keywords. For example, the keywords "where and closest" may be mapped to a business directory service that locates the closest business of a selected type. In another technique, a natural language understanding engine maps from request portion 124 to a service. In yet another technique, each service is associated with a number. Using this technique, request portion 124 contains a number that corresponds to a service. Numbers and corresponding services are predefined and are accessible to apparatus 110 and integration server 130. Apparatus 110 uses the mapping to create a service request message having an appropriate service request indication and integration server 130 uses the mapping to "decode" the service request indication. The mapping may be implemented in a data table, a spreadsheet, a relational database, or the like, and may be stored in data store 136, in apparatus 110, in integration server 130, in both, in another server, or the like. In the above example, at this step, integration application 134 determines that a business directory service is requested based on the text "Where is the closest Chinese Restaurant?"

At step 325, integration application 134 determines the location of wireless apparatus 110 from the contents of location portion 126 of the service request message. For example, integration application 134 reads a latitude and longitude of "39.0, -74.8." from location portion 126 of the service request message.

At step 330, integration application 134 determines a server capable of servicing the service request. To determine an appropriate server, integration server 130 maps from the service request to an application server 150. The mapping may be implemented in a data table, a spreadsheet, a relational database, or the like, and may be

stored in data store 136, for example. Alternatively, middleware 140 may implement mapping from the service request to an application server 150. For example, integration application 134 may determine that application server 150a provides a business directory service.

5           At step 340, integration application 134 requests the service from the appropriate application server 150. The request typically is converted to a format appropriate for the application server. Integration application 134 typically implements such a request through middleware 140 that routes the request to the appropriate application server 150 and coordinates receiving a reply from the appropriate application  
10 server 150.

          At step 350, integration application 134 receives a reply from the appropriate application server 150, typically via middleware 140. An exemplary reply may contain the text "Cheng's Chinese Restaurant, 1304 Rio Grande Ave., Wildwood, New Jersey." The reply may also contain a menu, a telephone number, directions to  
15 Cheng's from the calculated location of the wireless apparatus 110, and the like. The reply may further comprise listings of other business in the area meeting the user specified criteria.

          At step 360, integration application 134 formats the reply as a message appropriate for wireless network 120. The formatted reply message may contain any text  
20 suitable for transmission as an e-mail message. For example, integration application 134 creates an e-mail mail message addressed to "user1@bellsouth.com," addressed from "info@bellsouth.com" and having a message text of "Cheng's Chinese Restaurant, 1304 Rio Grande Ave., Wildwood, New Jersey."

At step 370, integration application 134 causes wireless communication ports 132 to send the formatted reply message to wireless communication apparatus 110. In this manner, a user can access a service typically not available via e-mail and can obtain location dependent information.

5 Various techniques may be used to implement some of the steps described above and various modifications can be made to the method described above. In one alternative technique, at step 220, user interface 116 displays a window, or the like, to assist the user in making a service request. For example, processor 118 may cause user interface to display a menu containing a limited number of acceptable service request  
10 selections. A first selection may be for a business directory lookup, a second selection may be for bill reporting, and the like. Because only acceptable service request selections are displayed in the menu, the user can only select acceptable service requests. In this manner, the chances that integration application 134 will misinterpret a service request is reduced.

15 The menu can also be multi-leveled. For example, processor 118 may cause user interface 117 to display a first service request selection menu such as described above. Upon selection from the first selection menu, a second selection menu may be displayed that corresponds to another level of selections. For example, upon selection of business directory lookup, the second selection menu may display business categories,  
20 such as restaurant, roofing contractors, and the like, similar to the categories of a telephone directory. Further selections may be received in subsequent menus to further define the service request. For example, the category "restaurant" may be divided into subcategories such as "Chinese," "Italian," and the like. In this manner, a user can

navigate through a multi-leveled menu system to select and define a desired service request.

If this menu driven technique is employed, then at step 230, processor 118 formats the service request message according to a mapping between menu selections and service request indications. The service request indication may be text based or symbol based. For example, a menu selection of directory service may be mapped to text "directory service" or may be mapped to number "1." In either event, the service request indications are decodable by integration server 134 via a mapping between service request indications and service requests. For example, processor 118 may create an e-mail message addressed to "info@bellsouth.com" having a message text of "Directory Service, Restaurant, Chinese." Alternatively, processor 118 may create an e-mail message addressed to "info@bellsouth.com" having a message text of "1, 47, 7" wherein 1 indicates a request for directory service, 47 indicates a restaurant, and 7 indicates a Chinese restaurant. If location information is embedded in the message, processor 118 may create an e-mail message addressed to "info@bellsouth.com" having a message text of "1, 47, 7, 39.0, -74.8."

Location information may also be entered into wireless communication apparatus 110 manually rather than using a global positioning system, as described in steps 200 and 210. For example, a user may enter into user interface 116 "I'm at the corner of 6<sup>th</sup> and West Streets." With this technique, during step 230, processor 118 formats the service request message with the manually entered information in location portion 126. Using this technique puts more of the burden of determining the location on integration server 134. With this technique, integration application 134 parses location portion 126 and determines a location based on the parsed information. The parsed

information comprises a text or natural language description of the location, which is more complex to decode than reading a latitude and longitude. This technique, therefore, may increase the chance for error in determining the location of wireless communication apparatus 110.

5           Some service requests do not include a request for location dependent information. For example, a user may wish to order a digital subscriber loop for home use. Such a service request is not dependent on the location of the wireless communication apparatus 110. To facilitate such a service request, a method executes steps 220 through steps 240 to produce a message and steps 300 - 370, excluding step 10 325, to service the request. This technique allows wireless e-mail access to services that may normally be inaccessible via wireless e-mail access.

10058721.012302  
15           Because e-mail access is often text based, the reply messages received by wireless communication apparatus 110 may be less user-friendly than those wireless apparatus with full Internet access. To increase the user-friendliness of wireless communication apparatus 110, it may contain graphical information that is combined with textual information received in reply messages from integration server 134. For example, wireless communication apparatus 110 may contain a graphical mapping application, and a reply message from integration server 130 may include text based location information, such as for example, an address, a latitude and longitude, and the like. The graphical 20 mapping application may read the text based location information and display a graphical map and graphically indicate the location (determined from the text based location information) on the graphical map. In this manner, a text based communication link may provide information in a user-friendly graphical form.

Rather than providing a reply in response to a user service request, integration server 130 may "push" information to wireless communication apparatus 110 at intervals or upon a triggering event. This information may also be dependent on the location of wireless communication apparatus 110. For example, a wireless apparatus user may receive advertisements that are based on the location of the wireless apparatus.

Figure 4 is a flow diagram of an illustrative method for sending such information to wireless communication apparatus 110. As shown in Figure 4, at step 400, integration server 130 receives an indication of the location of wireless communication apparatus 110. Integration server 130 may request the location of wireless communication apparatus 110 at intervals. Alternatively, wireless communication apparatus 110 may send the location of wireless communication apparatus 110 at intervals or may send the location based on a criterion, such as for example, when the location changes by a predefined amount.

At step 410, integration server 130 determines a business that is located closest to the received location. Integration server 130 also determines information about the business, for example, the phone number, the address, an advertisement slogan, or the like. Integration server 130 may perform this step or may utilize one of application servers 150 and/or middleware 140 to perform this step.

At step 420, integration server 130 formats the business information for communication over wireless network 120.

At step 430, integration server 130 sends the formatted business information to wireless communication apparatus 110.

The invention may also be used to provide services to a plurality of users. For example, user authentication is an important part of providing access to server based



services. Many systems, however, do not have reliable user authentication services. The invention may be used to provide user authentication to various wireless communication apparatus users.

Moreover, the services performed by application servers 150 may be provided on a service for a fee basis. In this manner, a small company could utilize services provided by application servers 150 without having to invest the capital to build an entire system. For example, a small company could use application servers 150 to host some of its processing applications. Employees of the small company could use their pagers to access applications on application server 150 (for example, an employee locator service). Before providing the requested service, integration server 130 may route an electronic pager signature and a password to an authentication server (e.g., one of application servers 150). The authentication server determines if the pager is authorized to access the service requested based on the electronic pager signature and the password. If the pager is authorized to access the requested service, the service request is forwarded to the proper application server 150 which process the request, similar to that described above. After the service is performed, the small company is billed for the service. If the pager is not authorized, the service request is not forwarded to the application server 150 and the integration server 130 may send a user unauthorized message to the pager.

Thus, there has been described an apparatus, system, and method for accessing a computer application via messages from a wireless communication apparatus and for including a location indication in the message to request location dependent information.

Portions of the invention may be embodied in the form of program code (i.e., instructions) stored on a computer-readable medium, such as a magnetic, electrical,

or optical storage medium, including without limitation a floppy diskette, CD-ROM, CD-RW, DVD-ROM, DVD-RAM, magnetic tape, flash memory, hard disk drive, or any other machine-readable storage medium, wherein, when the program code is loaded into and executed by a machine, such as a computer, the machine becomes an apparatus for practicing the invention. Portions of the invention may also be embodied in the form of program code that is transmitted over some transmission medium, such as over electrical wiring or cabling, through fiber optics, over a network, including the Internet or an intranet, or via any other form of transmission, wherein, when the program code is received and loaded into and executed by a machine, such as a computer, the machine becomes an apparatus for practicing the invention. When implemented on a general-purpose processor, the program code combines with the processor to provide a unique apparatus that operates analogously to specific logic circuits.

It is noted that the foregoing illustrations have been provided merely for the purpose of explanation and are in no way to be construed as limiting of the invention. While the invention has been described with reference to illustrative embodiments, it is understood that the words which have been used herein are words of description and illustration, rather than words of limitation. Further, although the invention has been described herein with reference to particular structure, methods, and embodiments, the invention is not intended to be limited to the particulars disclosed herein; rather, the invention extends to all structures, methods and uses that are within the scope of the appended claims. Those skilled in the art, having the benefit of the teachings of this specification, may effect numerous modifications thereto and changes may be made without departing from the scope and spirit of the invention, as defined by the appended claims.

## WHAT IS CLAIMED IS:

1. An apparatus for accessing a computer application via a wireless communication network, the apparatus comprising:

5 a global positioning device; and

a two-way wireless communication device in communication with the global positioning device.

10 2. The apparatus as recited in claim 1, wherein the two-way wireless communication device comprises a Mobitex compatible device.

3. The apparatus as recited in claim 1, wherein the two-way wireless communication device comprises a radio modem.

15 4. The apparatus as recited in claim 1, wherein the two-way wireless communication device comprises a cellular telephone.

20 5. The apparatus as recited in claim 1, further comprising a processor in communication with the global positioning device and in communication with the two-way wireless communication device.

6. The apparatus as recited in claim 5, further comprising a user interface in communication with the processor.

7. A method for requesting location dependent information, comprising:  
receiving signals from a global positioning system;  
calculating a location based upon the received signals;  
receiving an indication of a service request from a user interface;  
5 formatting the service request indication as a message for communication over a  
wireless network; and  
sending the formatted service request message over the wireless network.
8. The method as recited in claim 7, wherein receiving signals from a global  
10 positioning system comprises receiving signals from at least three satellites.
9. The method as recited in claim 7, wherein calculating a location comprises  
calculating a latitude and longitude.
10. The method as recited in claim 7, wherein receiving an indication of a service  
15 request comprises:  
displaying a menu containing a plurality of service request indications; and  
receiving a selection of one of the plurality of service request indications.
11. The method as recited in claim 7, wherein formatting the service request  
20 indication comprises formatting the service request indication in an e-mail message.
12. The method as recited in claim 11, wherein formatting the service request  
indication further comprises appending the calculated location to the e-mail message.

10058721.012802

13. The method as recited in claim 7, further comprising receiving a reply message from the wireless network, the reply message containing location dependent information.

5 14. The method as recited in claim 13, further comprising:  
parsing the location dependent information from the message; and  
displaying the location dependent information in a graphical form.

10 15. A method for providing server access to a wireless communication device that communicates over a wireless network, comprising:

receiving a message from a wireless network, the message containing a service request indication;

parsing the service request indication from the message;

determining a service request based upon the service request indication;

15 determining a server capable of servicing the service request;

requesting the service from the server;

receiving a reply from the server in response to requesting the service;

formatting the reply as a message for communication over the wireless network;

and

20 sending the formatted reply message to the wireless communication device.

16. The method as recited in claim 15, wherein receiving a message comprises receiving an e-mail message.

17. The method as recited in claim 15, wherein the received message further contains a location indication.

18. The method as recited in claim 17, further comprising parsing the location  
5 indication from the message.

19. The method as recited in claim 18, further comprising determining a location based upon the parsed location indication.

10 20. The method as recited in claim 19, wherein requesting the service from the server further comprises sending the location to the server.

21. The method as recited in claim 14, wherein requesting the service from the server comprises requesting the service from a middleware component.

15

22. The method as recited in claim 14, wherein determining a server capable of servicing the service request comprises mapping from the service request to a server capable of servicing the service request.

20 23. A method for sending location dependent information to a wireless communication apparatus that communicates over a wireless network, comprising:

receiving the location of the wireless communication apparatus;

determining information based on the received location;

formatting the information as a message for communication over the wireless network; and

sending the formatted message to the wireless communication apparatus via the wireless network.

5

24. The method as recited in claim 23, wherein formatting the information as a message comprises formatting the information as an e-mail message for communication over the wireless network.

10

25. The method as recited in claim 23, further comprising requesting the location of the wireless communication apparatus at intervals.

26. A method for providing location dependent information to a wireless communication device that communicates over a wireless network, comprising:

15

receiving a message from the wireless communication device, the message containing an indication of a service request and an indication of the location of the wireless communication device;

generating a reply based on the service request indication and the location indication;

20

formatting the reply as a second message for communication over the wireless network; and

sending the second message to the wireless communication device.

27. A system for accessing a computer application from a wireless communication apparatus via a wireless communication network, the system comprising:

a plurality of wireless communications ports that receive signals from the wireless communication network and convert the signals to a message containing an indication of a service request for the computer application; and

an integration application in communication with the plurality of wireless communication ports, the integration application determines a server capable of servicing the indicated service request, requests the service from the server, receives a reply from the server, formats the reply as a second message for communication over the wireless network, and sends the formatted message to the wireless communication apparatus.

28. The system as recited in claim 27, wherein the message further contains an indication of the location of the wireless communication apparatus.

29. The system as recited in claim 28, wherein the integration application further requests location dependent information from the server and the received reply contains location dependent information.

30. A method of providing services to wireless communication apparatus users comprising:

receiving an e-mail message that contains a request for a service;  
providing the service requested; and  
charging a fee for the service provided.



31. The method as recited in claim 30, further comprising:

determining a sending pager of the e-mail message;

performing an authentication check of the sending pager; and

forwarding the e-mail message and the results of the authorization check to the

5 server.

32. The method as recited in claim 30, wherein performing an authentication check of the sending pager comprises:

determining an electronic signature of the sending pager;

10 receiving a password; and

determining if the sending pager is authorized to access the requested service based on the electronic signature and the password.

33. The method as recited in claim 30, wherein providing the service requested  
15 comprises determining a server capable of servicing the service request.

34. A computer-readable medium having instructions stored thereon for requesting location dependent information, the instructions, when executed on a processor, causing the processor to perform the following:

20 receiving signals from a global positioning system;

calculating a location based upon the received signals;

receiving an indication of a service request from a user interface;

formatting the service request indication as a message for communication over a wireless network based; and

sending the formatted service request message over the wireless network.

35. The computer-readable medium as recited in claim 34, wherein calculating a location comprises calculating a latitude and longitude.

5

36. The computer-readable medium as recited in claim 34, wherein formatting the service request indication comprises formatting the service request indication in an e-mail message.

10 37. The computer-readable medium as recited in claim 36, wherein formatting the service request indication further comprises appending the calculated location to the e-mail message.

15 38. The computer-readable medium as recited in claim 34, wherein the instructions further cause the processor to perform receiving a reply message from the wireless network, the reply message containing location dependent information.

20 39. A computer-readable medium having instructions stored thereon for providing server access to a wireless communication device that communicates over a wireless network, the instructions when executed on a processor, causing the processor to perform the following:

receiving a message from a wireless network, the message containing a service request indication;

parsing the service request indication from the message;

- determining a service request based upon the service request indication;  
determining a server capable of servicing the service request;  
requesting the service from the server;  
receiving a reply from the server in response to requesting the service;  
5 formatting the reply as a message for communication over the wireless network;  
and  
sending the formatted reply message to the wireless communication device.

10 40. The computer-readable medium as recited in claim 39, wherein receiving a message comprises receiving an e-mail message.

15 41. The computer-readable medium as recited in claim 39, wherein the received message further contains a location indication and the instructions further cause the processor to perform:

- parsing the location indication from the message; and  
determining a location based upon the parsed location indication.

20 42. The computer-readable medium as recited in claim 41, wherein requesting the service from the server further comprises sending the location to the server.

43. A computer-readable medium having instructions stored thereon for sending location dependent information to a wireless communication apparatus that communicates over a wireless network, the instructions when executed on a processor, causing the processor to perform the following:

receiving the location of the wireless communication apparatus;  
determining information based on the received location;  
formatting the information as a message for communication over the wireless network; and

5 sending the formatted message to the wireless communication apparatus via the wireless network.

44. The computer-readable medium as recited in claim 43, wherein formatting the information as a message comprises formatting the information as an e-mail message for  
10 communication over the wireless network.

45. A computer-readable medium having instructions stored thereon for providing location dependent information to a wireless communication device that communicates over a wireless network, the instructions when executed on a processor causing the  
15 processor to perform:

receiving a message from the wireless communication device, the message containing an indication of a service request and an indication of the location of the wireless communication device;

generating a reply based on the service request indication and the location  
20 indication;

formatting the reply as a second message for communication over the wireless network; and

sending the second message to the wireless communication device.

## ABSTRACT

Server access is provided to a wireless apparatus via a wireless network. A message is received containing a service request. The service and sever capable of servicing the service request is determined. The service is requested from the server and  
5 a reply is received. The reply is formatted for communication over the wireless network and sent. Location dependent information may also be requested with a wireless apparatus including a global positioning device and a two-way wireless communication device. Such an apparatus can "know" its global location and therefore can request information dependent on that location. The apparatus receives signals from a global  
10 positioning system and calculates a location. The calculated location is included in the service request sent over the wireless network.

10058721.012802

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

## In Re Application of:

Thomas W. Rehkopf

Group Art Unit: Not Yet  
AssignedFor: SYSTEM AND METHOD FOR  
ACCESSING COMPUTER SERVICES  
VIA A WIRELESS NETWORK

Examiner: Not Yet Assigned

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a

☒ Utility Patent ☐ Design Patent

is sought on the invention, whose title appears above, the specification of which:

☒ is attached hereto.☐ was filed on \_\_\_\_\_ as Serial No. \_\_\_\_\_.☐ said application having been amended on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to the patentability of this application in accordance with 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a-d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed:

10058721-012802

DOCKET NO. BELL-0159/00064

- 2 -

PATENT

Priority  
Claimed  
(If X'd)

Country

Serial Number

Date Filed

☐☐☐☐

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number

Date Filed

Patented/Pending/Abandoned

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Serial Number

Date Filed

1058721-012802

I hereby appoint the following persons as attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Marcus DelgadoReg. No. 38,122

of BELL SOUTH INTELLECTUAL MANAGEMENT PROPERTY CORPORATION,  
1155 Peachtree Street, N.E., Suite 500, Atlanta, GA 30309; and

Steven J. RocciReg. No. 30,489Raymond N. Scott, Jr.Reg. No. 48,666

of WOODCOCK WASHBURN LLP, One Liberty Place, 46<sup>th</sup> Floor, Philadelphia,  
Pennsylvania 19103.

Address all telephone calls and correspondence to:

Raymond N. Scott, Jr.  
WOODCOCK WASHBURN LLP  
One Liberty Place - 46th Floor  
Philadelphia PA 19103  
Telephone No.: (215) 568-3100  
Facsimile No.: (215) 568-3439

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name: Thomas W. Rehkopf	Signature  Date of Signature: _____  Citizenship: <u>United States of America</u>
Mailing Address: 270 Lakemont Drive Roswell, Georgia 30075	
City/State of Actual Residence: Roswell, Georgia 30075	

10058721 "012802



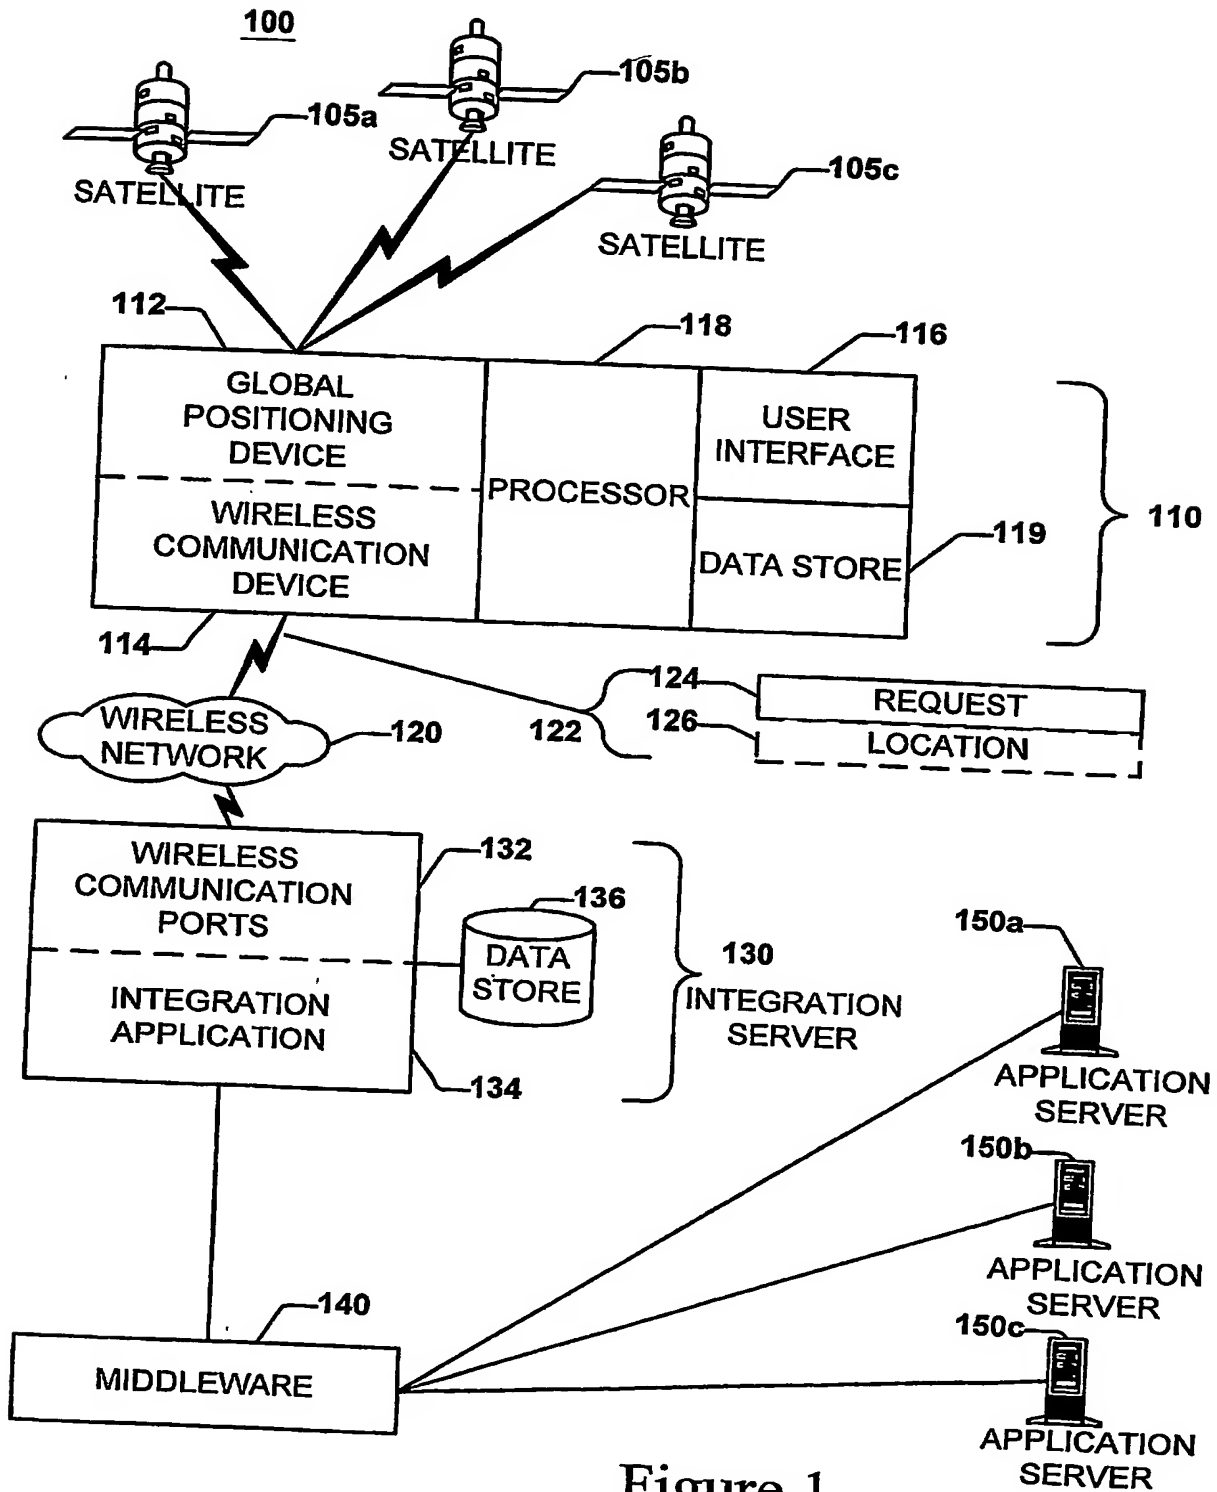


Figure 1

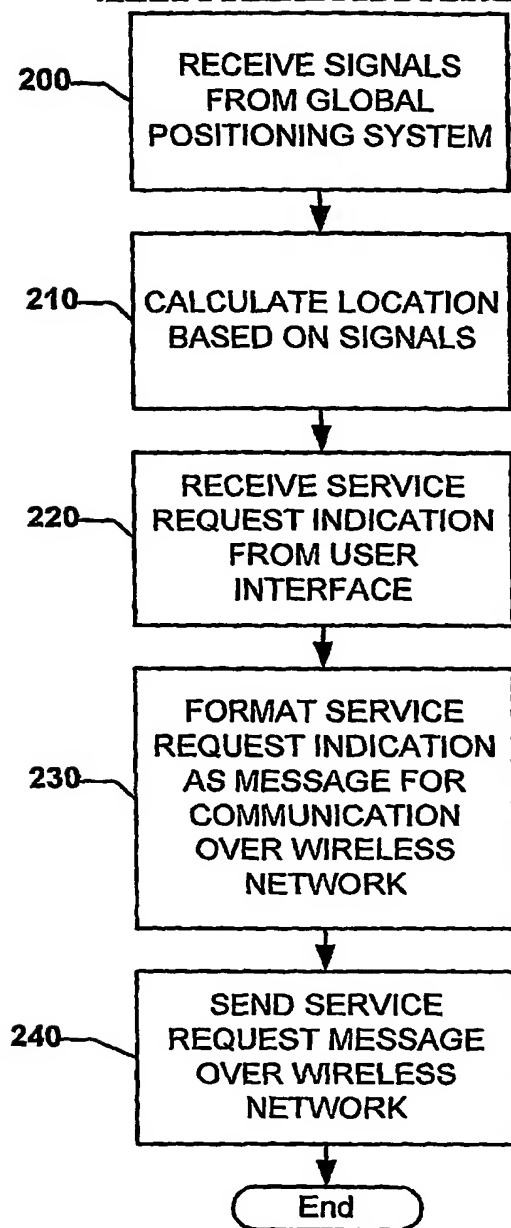


Figure 2

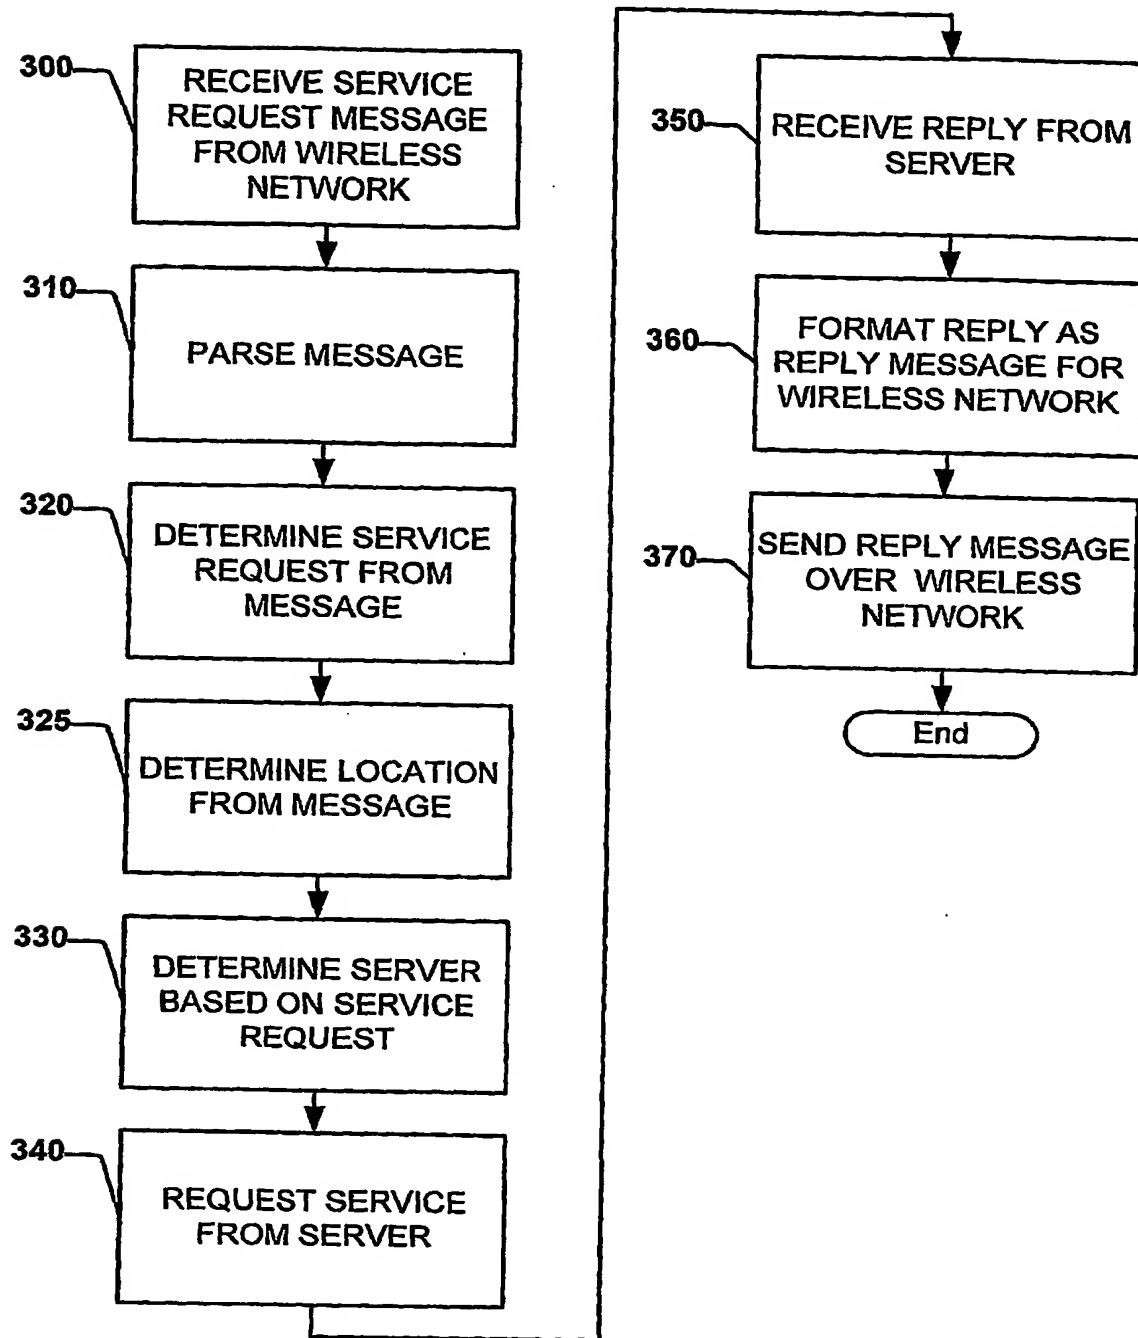


Figure 3

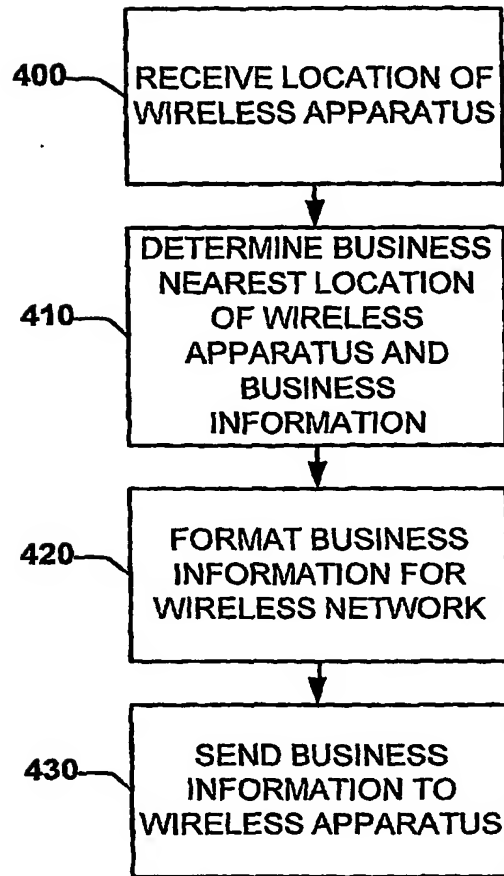


Figure 4

1058721.012802

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**